




51 XLE

FEATURES

- Solid lift up lid
- Thermometer
- Castors
- Baskets
- Lock
- Options:
 - Dividers
 - Graphics (minimum quantity required)
 - Castors with brake

| XLE |

OPTIMAL LOW ENERGY SOLUTION

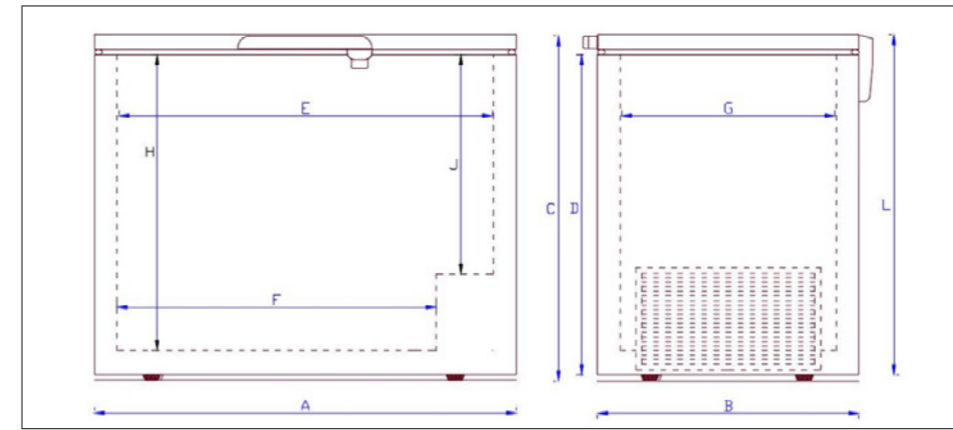

100 MM INSULATION



11 XLE



21 XLE



31 XLE



41 XLE

	XLE 11	XLE 21	XLE 31	XLE 41	XLE 51
CLIMATE CLASS	B (former *4+*)	B (former *4+*)	B (former *4+*)	B (former *4+*)	B (former *4+*)
VOLUME					
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
TEMPERATURE					
Ambient temperature range, deg. C	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Temperature range inside unit, deg. C	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
COOLING DATA					
Refrigerant	R600a	R600a	R600a	R600a	R600a
Refrigerant amount	65	75	85	105	106
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
ENERGY					
Energy consumption kwh 24 h at 30 deg C	0,43	0,55	0,64	0,72	0,80
AEC- annual energy consumption, kwh	157	201	234	263	292
EEL- Efficiency Index	n/a	n/a	n/a	n/a	n/a
EC- Energy class	n/a	n/a	n/a	n/a	n/a
Input power (watt)	90	102	114	126	138
ELECTRICAL DATA					
Power	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz
Power 110volt / 60 hz	Optional	Optional	Optional	Optional	Optional
Power consumption, amperes	4	4	4	4	4
DIMENSIONS					
External dimensions (wxdxh)	725*655*865	1055*655*865	1305*655*865	1505*655*865	1705*655*865
Internal dimensions (wxdxh)	520*450*650	850*450*650	1100*450*650	1300*450*650	1500*450*650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation_mm	100	100	100	100	100
STANDARD					
Outer cabinet	White Galv. Steel	White Galv. Steel	White Galv. Steel	White Galv. Steel	White Galv. Steel
Inner cabinet	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Insulation	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Thermometer	digital	digital	digital	digital	digital
Thermostat	mechanical	mechanical	mechanical	mechanical	mechanical
Baskets included	1	2	3	4	4
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
OPTIONS					
Max. Number of baskets	2	4	5	6	7
Dividers	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a
Graphics	Optional	Optional	Optional	Optional	Optional
WEIGHT					
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' ft HC container	126	88	62	56	52
Standard Trailer capacity	102	74	60	50	44