



UNI 31 S


UNI-S

LOW TEMP FREEZER FOR FROZEN FOOD

Low temperatures are often essential when you need to serve special ice cream or special kind of food. The UNI-S offers a unique combination of -35°C and glass sliding lids.

FEATURES

- Flat sliding glass lids
- Digital controller with thermometer and thermostat
- Castors
- Options:
 - Baskets
 - Dividers
 - Lock
 - Graphics (minimum quantity required)
 - Castors with brake

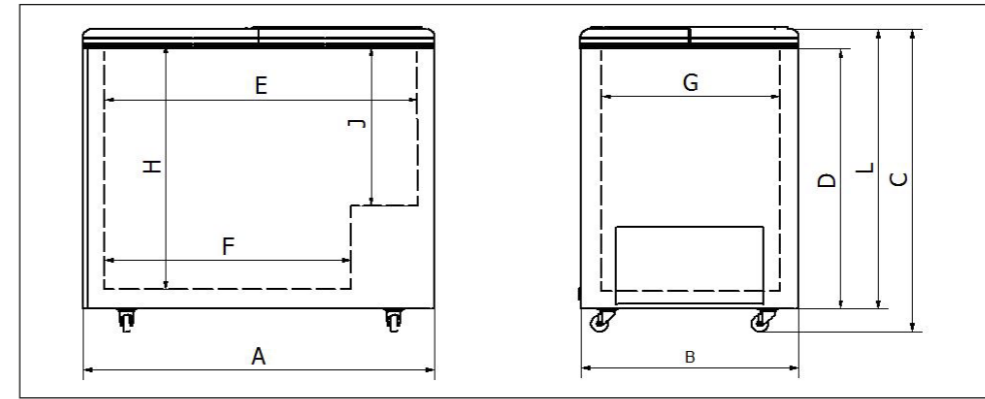

UNI 11 S



UNI 21 S



UNI 31 S



	UNI 11 S	UNI 21 S	UNI 31 S
CLIMATE CLASS	B (former *4*)	B (former *4*)	B (former *4*)
VOLUME			
Gross volume, litres	140	243	322
Net volume, litres	116	203	270
TEMPERATURE			
Ambient temperature range, deg. C	+10 to +30	+10 to +30	+10 to +30
Temperature range inside unit, deg. C	-10 to -35	-10 to -35	-10 to -35
COOLING DATA			
Refrigerant	R290	R290	R290
Refrigerant amount	65	74	81
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
ENERGY			
Energy consumption kwh 24 h at 30 deg C	1,9	3,0	3,1
AEC- annual energy consumption, kwh	690	1088	1124
EEL- Efficiency Index	n/a	n/a	n/a
EC- Energy class	n/a	n/a	n/a
Input power (watt)	210	340	380
ELECTRICAL DATA			
Power	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz
Power 110volt / 60 hz	Optional	Optional	Optional
Power consumption, amperes	4	4	4
DIMENSIONS			
External dimensions (wxdxh)	725*655*865	1055*655*865	1305*655*865
Internal dimensions (wxdxh)	520*450*710	850*450*710	1100*450*710
Dimension A	725	1055	1305
Dimension B	655	655	655
Dimension C	916	916	916
Dimension D	780	780	780
Dimension E	520	850	1100
Dimension F	320	650	900
Dimension G	450	450	450
Dimension H	710	710	710
Dimension J	460	460	460
Dimension L	846	846	846
Insulation, mm	100	100	100
STANDARD			
Outer cabinet	White Galv. Steel	White Galv. Steel	White Galv. Steel
Inner cabinet	Steel inner liner	Steel inner liner	Steel inner liner
Insulation	Polyurethane	Polyurethane	Polyurethane
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.
Thermostat- included in controller	Incl.	Incl.	Incl.
Potential free contact for remote alarm	Incl.	Incl.	Incl.
Castors	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.
OPTIONS			
Max. Number of baskets (KURUNI01)	2	3	4
Dividers	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional
Internal light	n/a	n/a	n/a
Graphics	Optional	Optional	Optional
WEIGHT			
Net weight, kg	46	59	67
Gross weight, kg	49	62	71
SHIPPING			
20' cont. Capacity	42	30	24
40' cont. Capacity	90	64	50
Standard Trailer capacity	102	74	60

*) Climate class 4 has been changed into Climate class A according to the new EU regulation.
 *) Climate class 7 has been changed into Climate class B according to the new EU regulation.
 *) Climate class 5 has been changed into Climate class C according to the new EU regulation.